


COMMON MODE INDUCTORS – EF4P4532 SERIES



●FEATURE






1. High common mode impedance at high frequency effects excel noise suppression performance

●Applications

1. Ideal for use as common-mode chokes for USB interface

●Shape and Dimension and Schematics and Land Patterns(mm)

EF4P4532 (1812)

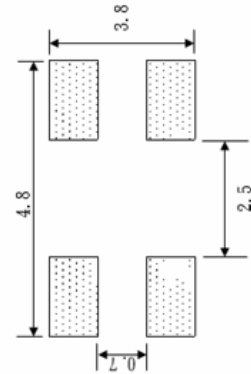

D1=1.0+/-0.3mm, D2=1.2+/-0.3mm

●Specification

Dimension in m/m

PART NO.	Common Mode Impedance (ohm) (tolerance±25%)	Rated Current (mA)	Rated Voltage (Vdc)	Insulation Resistance (M ohm)	Withstand Voltage (Vdc)	DC Resistance (max.) (ohm)
EF4P4532-900	90 (Typ.) at 100MHz	2000	50	10 min	125	0.05
EF4P4532-601	600 (Typ.) at 100MHz	1500	50	10 min	125	0.10
EF4P4532-102	1000 (Typ.) at 100MHz	1000	50	10 min	125	0.15


Note1. Measurement ambient temperature of electrical : at 20°C

Note2. Test equipment: HP4291A




An ISO 9001 Company

COMMON MODE INDUCTORS – EF4P4532 SERIES




● EF4P 4532


EF4P4532-900

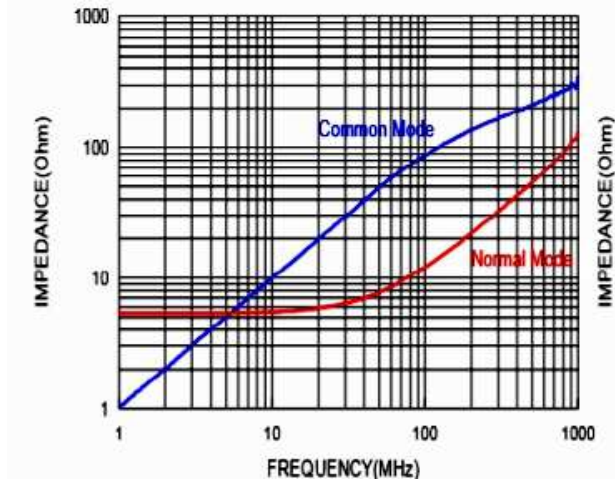


EF4P4532-601

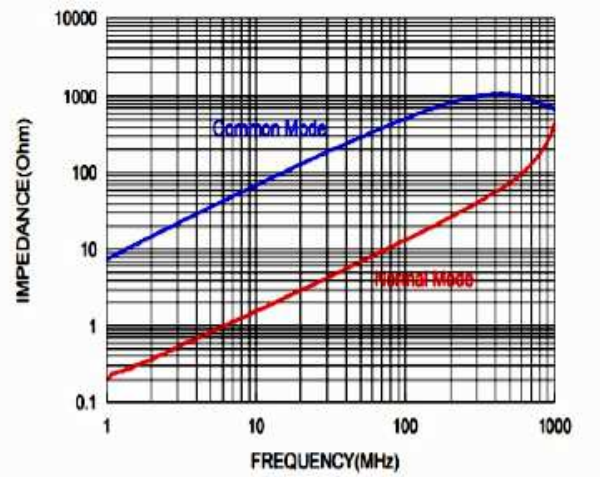


EF4P4532-102

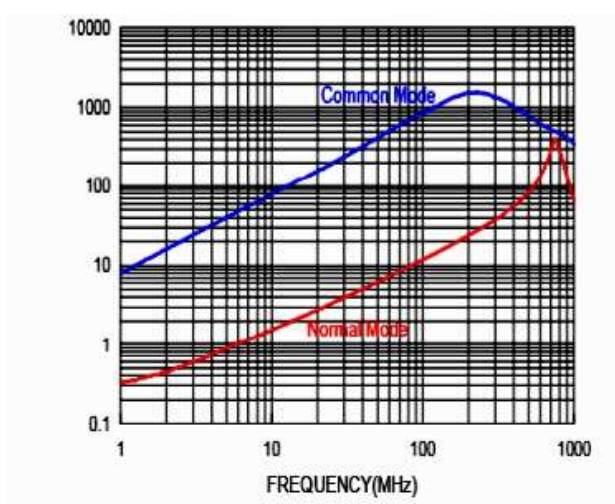


● Test circuit



COMMON MODE




NORMAL MODE




GENERAL CHARACTERISTICS

1. Operating temperature range: -40 TO + 125°C (Includes temperature when the coil is heated)
2. External appearance: On visual inspection, the coil has no external defects.
3. Terminal strength: After soldering. Between copper plate and terminals of coil. Push in two directions of X.Y withstanding at below conditions.
Terminal should not peel off. (refer to figure at right) 0.5kg Min –EF4P4532.
4. Insulating resistance: Over 100MΩ at 100V D.C. between coil and core.
5. Dielectric strength: No dielectric breakdown at 100V D.C. for 1 minute between coil and core.
6. Temperature characteristics: Inductance coefficient $(0\sim 2,000)\times 10^{-6}/^{\circ}\text{C}$ (-25~+80°C) , inductance deviation within $\pm 5.0\%$, after 96 hours.
7. Humidity characteristics(Moisture Resistance): Inductance deviation within $\pm 5\%$, after 96 hours in 90~95% relative humidity at $40 \pm 2^{\circ}\text{C}$ and 1 hour drying under normal condition.
8. Vibration resistance: Inductance deviation within $\pm 5\%$, after vibration for 1 hour. In each of three orientations at sweep vibration (10~55~10 Hz) with 1.5mm P-P amplitudes.
9. Shock resistance: Inductance deviation within $\pm 5\%$, after being dropped once with 981m/s² (100G) shock attitude upon a rubber block method shock testing machine, in three different orientations.
10. Resistance to Soldering Heat: 260°C , 10 seconds(See attached recommend reflow)
11. Storage environment: Storage condition: Temperature Range: 10°C ~ 35°C (Generally: 21°C ~ 31°C) , Humidity Range: 50% ~ 80% RH (Generally: 65% ~ 75%) ; Transportation condition: Temperature Range: -35°C ~ 85°C , Humidity Range: 50% ~ 95% RH
12. Use components within 12 months. If 12 months or more have elapsed, check solderability before use.
13. Reflow profile recommend:



Lead-free heat endurance test

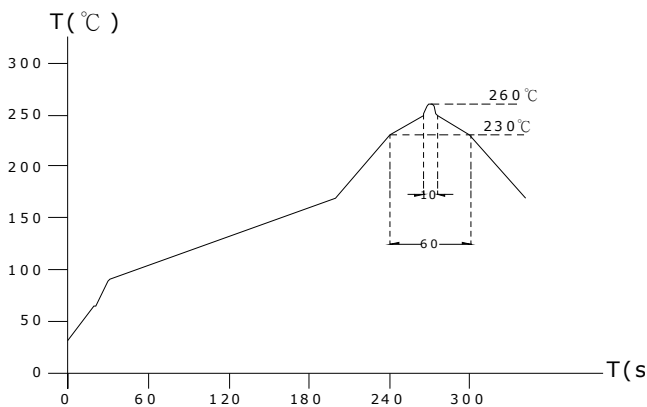

Lead-free the recommended reflow condition

