CLAMPING & UNITY TYPE

PITCH=3.5mm

■ FEATURES

- Easy to assemble for any number of positions
- End stackable without any loss of P.C.B. space
- Special wire protector design to ensure reliable wire clamping
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Compact size for P.C.B.

■ SPECIFICATIONS

• Pitch 3.5 mm

Wire range 26~16 AWG (1.5mm²)

No. of pole per block
8P

Rating
 10 Amp, 300 VAC

Housing PA66

Terminals
 Screws
 Wire cage
 Torque
 Tin plated over Copper Alloy
 M2.0x0.4P, Zinc plated over Steel
 Nickel plated over Zinc Alloy
 0.2 N-m (1.7 lb-in) (tested by

manual torque screwdriver)


Operating temperature -30°C ~+110°C

(includes temperature rise limit)

Stripping length5mm

UL Approval 300V, 10A, 26~16 AWG

■ PART NUMBERING SYSTEM

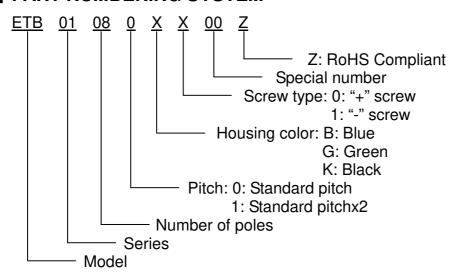

■ DRAWING

