

SCREWLESS TYPE TERMINAL BLOCK — ETB62 SERIES



SCREWLESS TYPE

PITCH=5.08mm

FEATURES


- Easy to assemble for any number of positions
- End stackable without any loss of P.C.B. space
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Screwless design can reduce time for connecting wire

SPECIFICATIONS

- Pitch 5.08mm
- Wire range 24~14 AWG (2.5mm²)
- No. of pole per block 2P to 16P
- Rating 10 Amp, 300 VAC
- Housing PA66
- Contacts Tin plated over Phosphor bronze
- Springs Stainless Steel
- Push button PA66
- Mount screws M2.6x0.45P, Zinc plated over Steel
- Operating temperature -30°C ~ +110°C
(includes temperature rise limit)
- Stripping length 9mm
- Contact resistance <15mΩ
- UL Approval 300V, 10A, 24~12 AWG
- Plug in with ETB44




PART NUMBERING SYSTEM

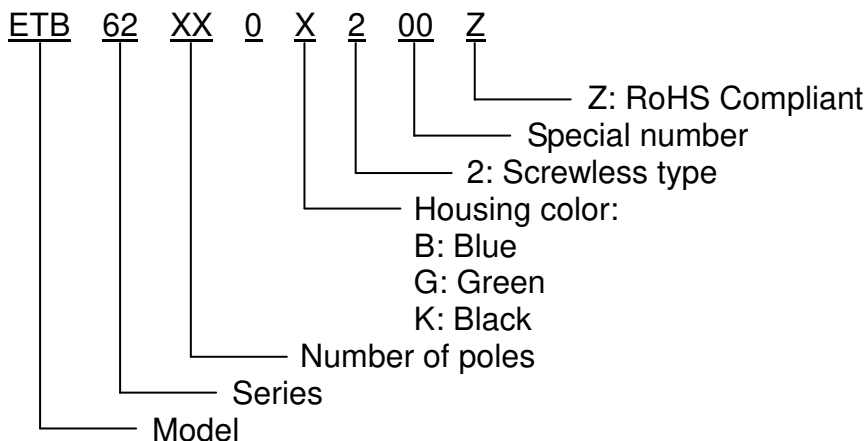

SCREWLESS TYPE TERMINAL BLOCK - ETB62 SERIES



■ DRAWING

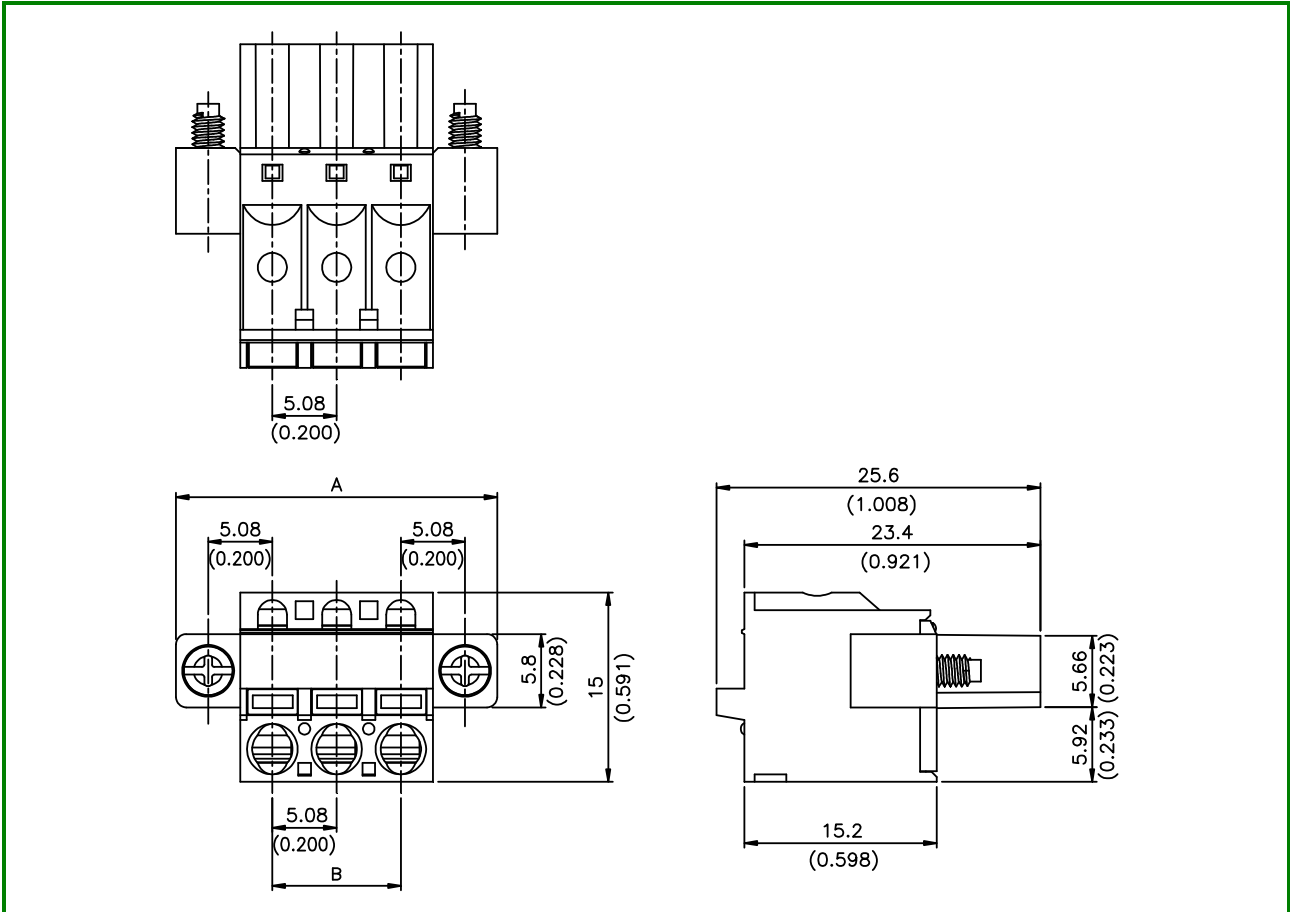

POLE DIM.	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A	20.32 (0.800)	25.40 (1.000)	30.48 (1.200)	35.56 (1.400)	40.64 (1.600)	45.72 (1.800)	50.80 (2.000)	55.88 (2.200)	60.96 (2.400)	66.04 (2.600)	71.12 (2.800)	76.20 (3.000)	81.28 (3.200)	86.36 (3.400)	91.44 (3.600)
B	5.08 (0.200)	10.16 (0.400)	15.24 (0.600)	20.32 (0.800)	25.40 (1.000)	30.48 (1.200)	35.56 (1.400)	40.64 (1.600)	45.72 (1.800)	50.80 (2.000)	55.88 (2.200)	60.96 (2.400)	66.04 (2.600)	71.12 (2.800)	76.20 (3.000)