

SCREWLESS TYPE TERMINAL BLOCK — ETB68 SERIES



SCREWLESS TYPE


PITCH=3.81mm

FEATURES


- End stackable without any loss of P.C.B. space
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Screwless design can reduce time for connecting wire

SPECIFICATIONS

- Pitch 3.81mm
- Wire range 28~16 AWG (1.5mm²)
- No. of pole per block 2P to 16P
- Rating 8 Amp, 300 VAC
- Housing PA66
- Contacts Tin plated over Phosphor bronze
- Springs Stainless Steel
- Push button PA66
- Mount screws M2.6x0.45P, Zinc plated over Steel
- Operating temperature -30°C ~ +110°C
(includes temperature rise limit)
- Stripping length 9mm
- Contact resistance <15mΩ
- UL Approval 300V, 8A, 18~16 AWG
- Plug in with ETB4B

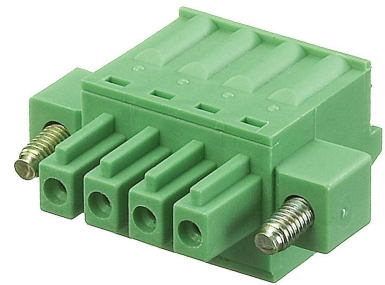


PART NUMBERING SYSTEM

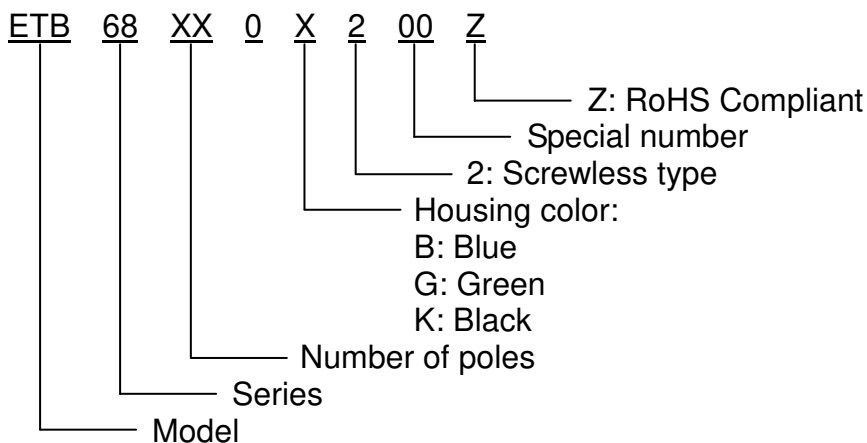

SCREWLESS TYPE TERMINAL BLOCK – ETB68 SERIES



■ DRAWING

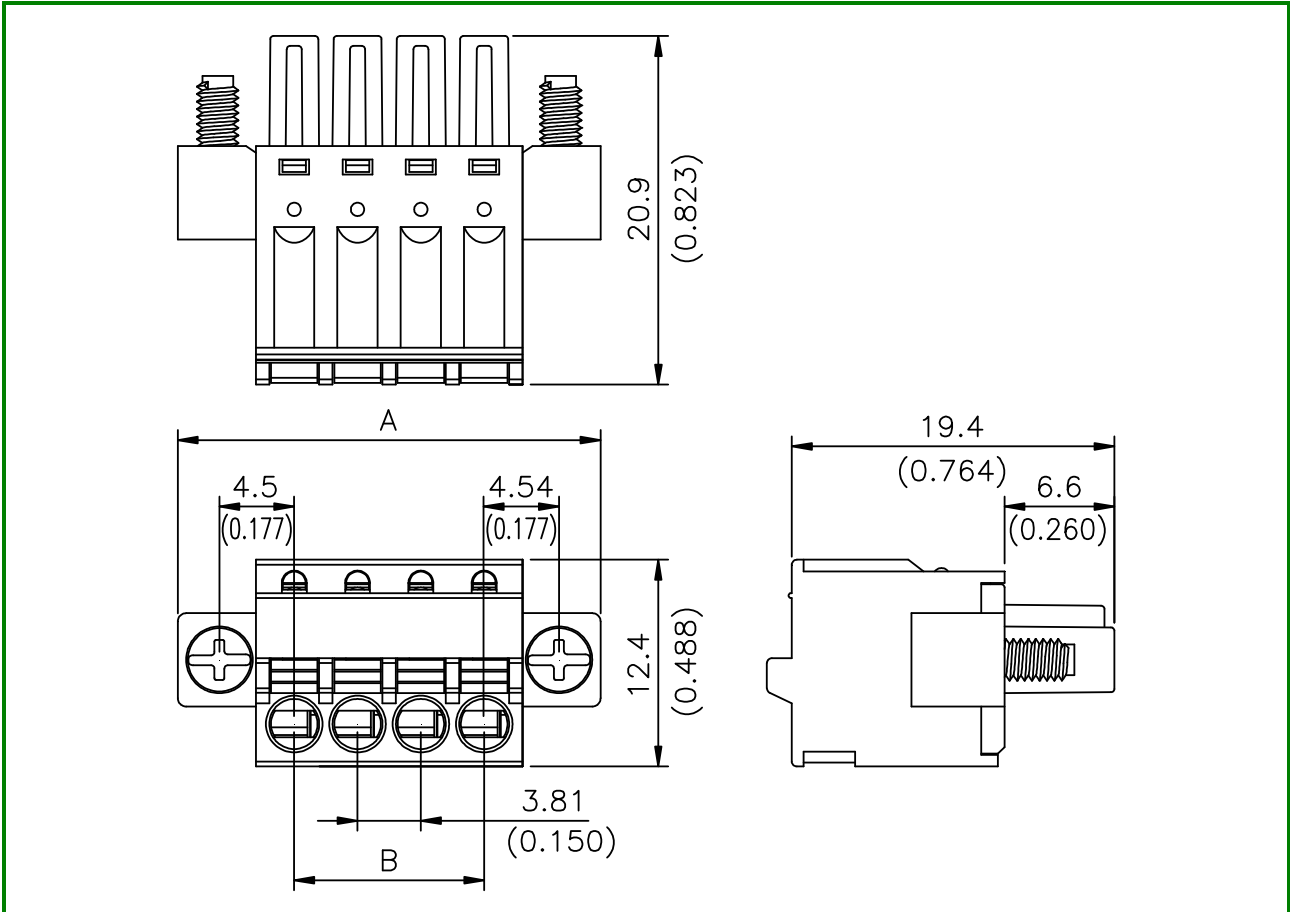

POLE DIM.	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A	17.81 (0.701)	21.62 (0.851)	25.43 (1.001)	29.24 (1.151)	33.05 (1.301)	36.86 (1.451)	40.67 (1.601)	44.48 (1.751)	48.29 (1.901)	52.10 (2.051)	55.91 (2.201)	59.72 (2.351)	63.53 (2.501)	67.34 (2.651)	71.15 (2.801)
B	3.81 (0.150)	7.62 (0.300)	11.43 (0.450)	15.24 (0.600)	19.05 (0.750)	22.86 (0.900)	26.67 (1.050)	30.48 (1.200)	34.29 (1.350)	38.10 (1.500)	41.91 (1.650)	45.72 (1.800)	49.53 (1.950)	53.34 (2.100)	57.15 (2.250)