

SCREWLESS TYPE TERMINAL BLOCK — ETB6D SERIES



SCREWLESS TYPE

PITCH=3.81mm

FEATURES


- Easy to assemble for any number of positions
- End stackable without any loss of P.C.B. space
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Screwless design can reduce time for connecting wire

SPECIFICATIONS

- Pitch 3.81mm
- Wire range 28~16 AWG (1.5mm²)
- No. of pole per block 2P to 20P
- Rating 8 Amp, 300 VAC
- Housing PA66
- Terminals Tin plated over Brass
- Springs Stainless Steel
- Push button PA66
- Operating temperature -30°C~+110°C
(includes temperature rise limit)
- Stripping length 9mm
- UL Approval 300V, 8A, 28~16 AWG




PART NUMBERING SYSTEM

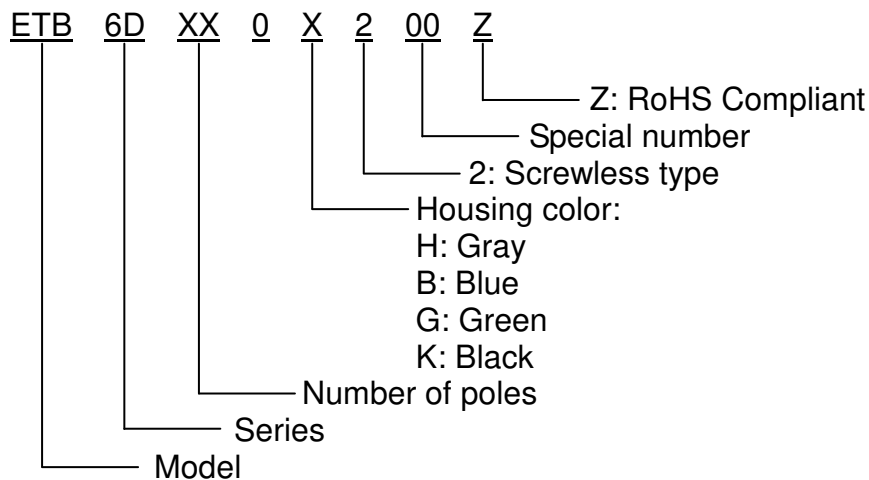

SCREWLESS TYPE TERMINAL BLOCK - ETB6D SERIES



DRAWING

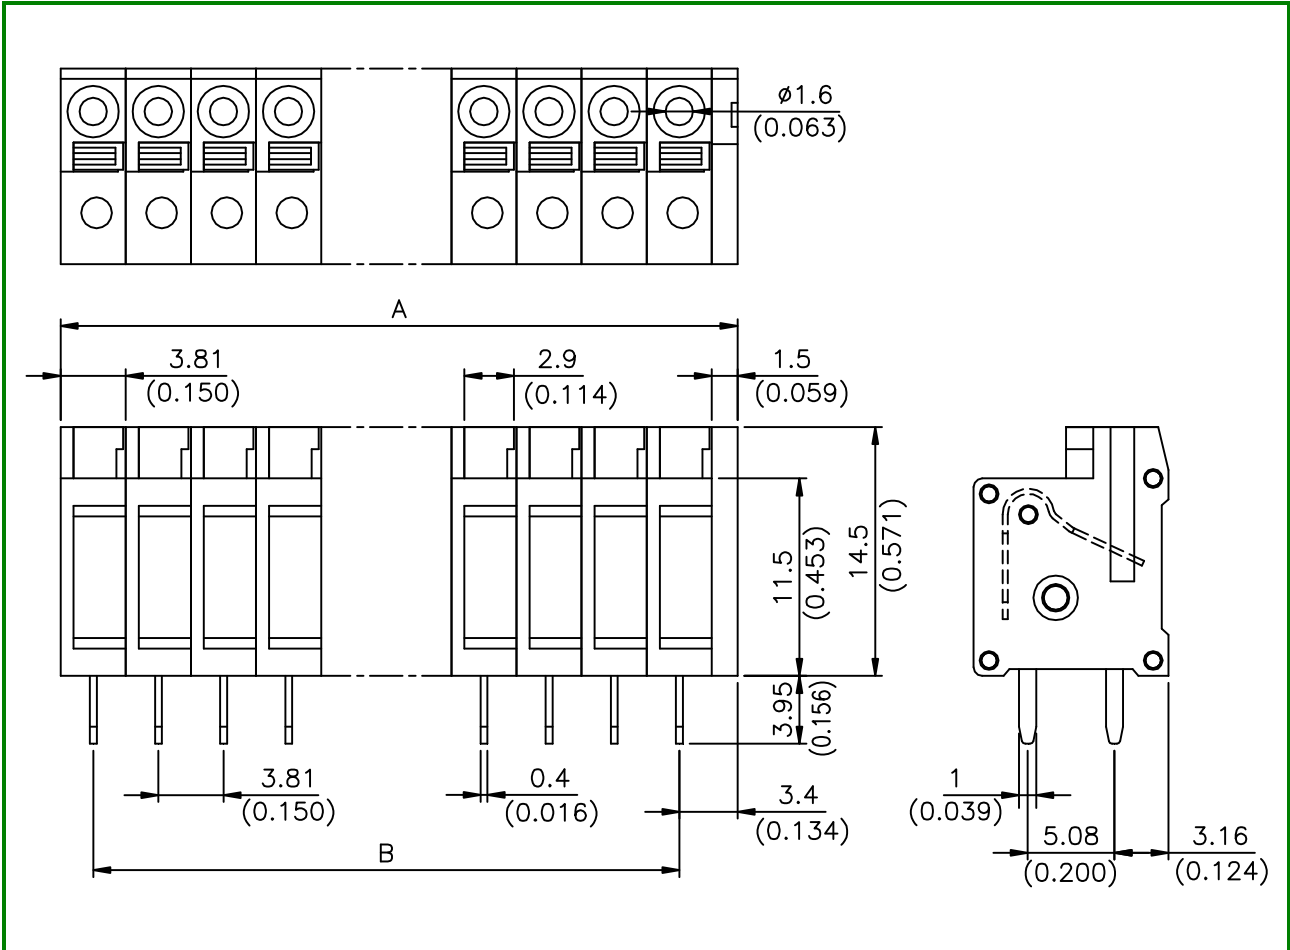

POLE DIM.	2	3	4	5	6	7	8	9	10	11	12	13
A	9.12 (0.359)	12.93 (0.509)	16.74 (0.659)	20.55 (0.809)	24.36 (0.959)	28.17 (1.109)	31.98 (1.259)	35.79 (1.409)	39.60 (1.559)	43.41 (1.709)	47.22 (1.859)	51.03 (2.009)
B	3.81 (0.150)	7.62 (0.300)	11.43 (0.450)	15.24 (0.600)	19.05 (0.750)	22.86 (0.900)	26.67 (1.050)	30.48 (1.200)	34.29 (1.350)	38.10 (1.500)	41.91 (1.650)	45.72 (1.800)
POLE DIM.	14	15	16	17	18	19	20					
A	54.84 (2.159)	58.65 (2.309)	62.46 (2.459)	66.27 (2.609)	70.08 (2.759)	73.89 (2.909)	77.70 (3.059)					
B	49.53 (1.950)	53.34 (2.100)	57.15 (2.250)	60.96 (2.400)	64.77 (2.550)	68.58 (2.700)	72.39 (2.850)					