

# SCREWLESS TYPE TERMINAL BLOCK — ETB6G SERIES



**SCREWLESS TYPE**

**PITCH=5.0mm**

## FEATURES


- Easy to assemble for any number of positions
- End stackable without any loss of P.C.B. space
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Screwless design can reduce time for connecting wire

## SPECIFICATIONS

- Pitch 5.0mm
- Wire range 24~14 AWG (2.5mm<sup>2</sup>)
- No. of pole per block 2P to 16P
- Rating 10 Amp, 300 VAC
- Housing PA66
- Contacts Tin plated over Phosphor bronze
- Springs Stainless Steel
- Push button PA66
- Operating temperature -30°C ~ +110°C  
(includes temperature rise limit)
- Stripping length 9mm
- UL Approval 300V, 10A, 24~14 AWG
- Plug in with ETB83 / ETB8H




## PART NUMBERING SYSTEM

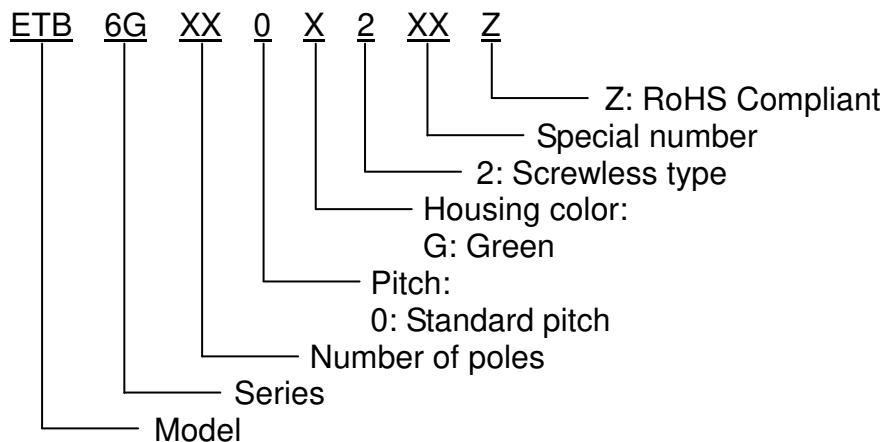

# SCREWLESS TYPE TERMINAL BLOCK – ETB6G SERIES



## DRAWING

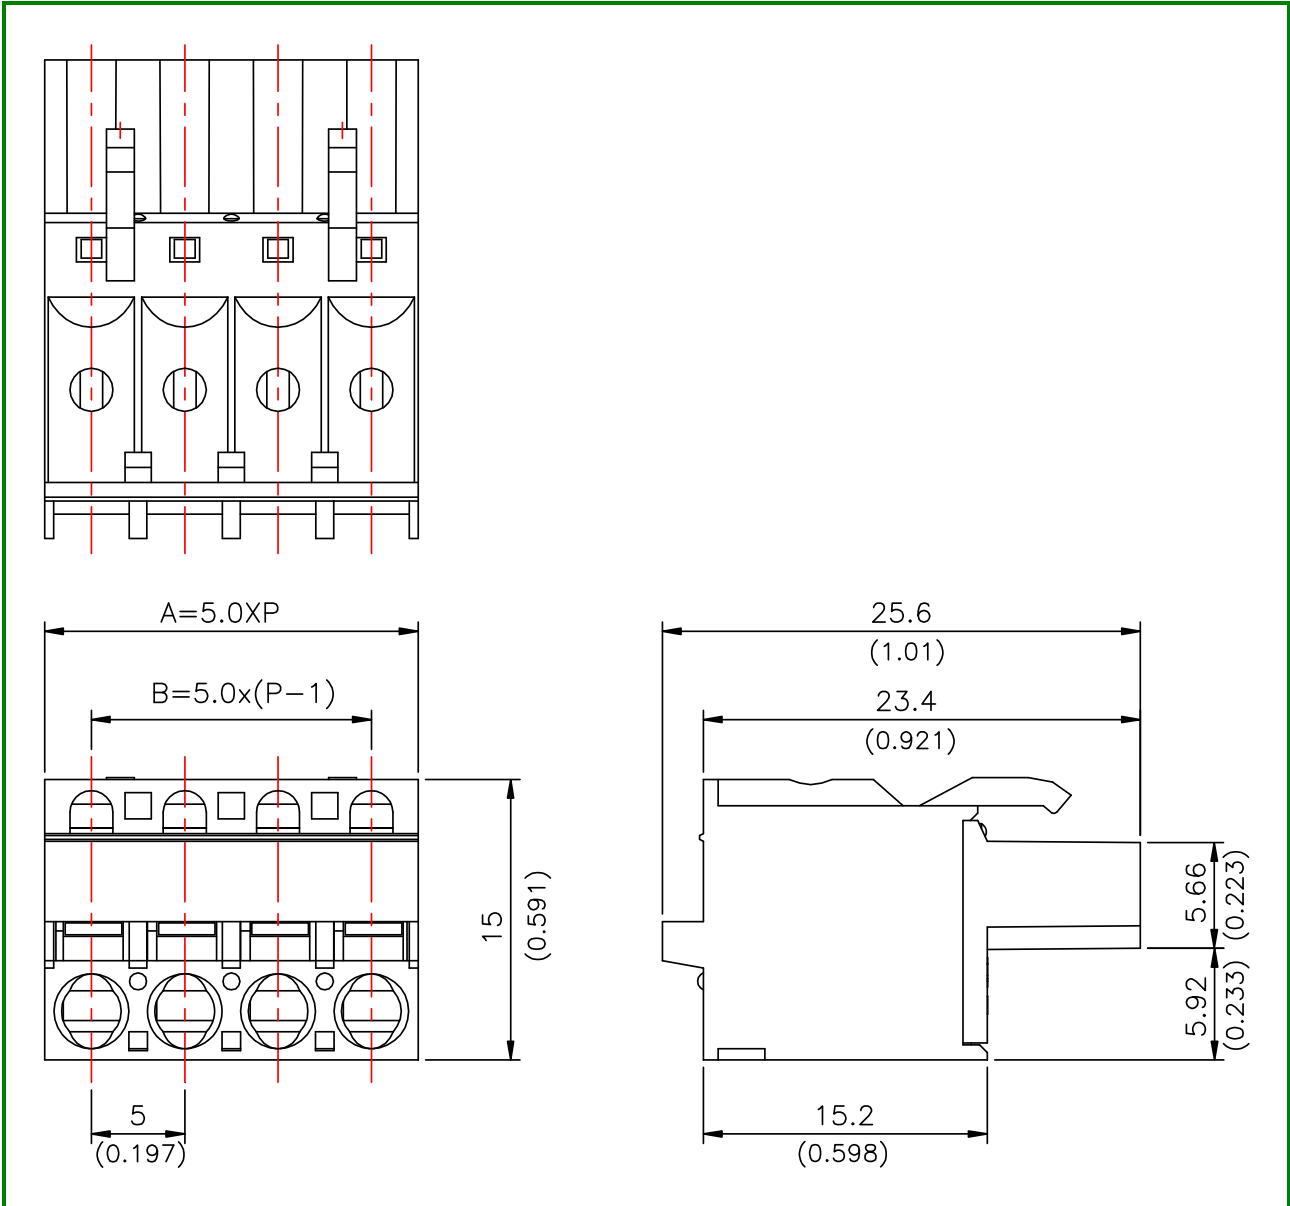

POLE DIM.	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A	10 (0.394)	15 (0.591)	20 (0.787)	25 (0.984)	30 (1.181)	35 (1.378)	40 (1.575)	45 (1.772)	50 (1.969)	55 (2.165)	60 (2.362)	65 (2.559)	70 (2.756)	75 (2.953)	80 (3.150)
B	5 (0.197)	10 (0.394)	15 (0.591)	20 (0.787)	25 (0.984)	30 (1.181)	35 (1.378)	40 (1.575)	45 (1.772)	50 (1.969)	55 (2.165)	60 (2.362)	65 (2.559)	70 (2.756)	75 (2.953)