

SCREWLESS TYPE LED LIGHTING SMD CONNECTOR — ETBL40 SERIES



SCREWLESS TYPE

PITCH=4.0mm

■ FEATURES


- UL approved (UL1977)
- UL 94V-0 fire retardant plastics
- Low profile with small footprint (3.8mm height)
- SMD terminal with low inserting force cage clamp
- Push wire-release button
- Time-Saving screwless design

■ SPECIFICATIONS

- Pitch 4.0mm, 8.0mm
- Wire range 24~18 AWG
- No. of pole per block 1P or 2P or 3P
- Rating 9 Amp, 320 VAC
- Housing LCP (UL 94V-0)
- Spring terminals Tin plated over Copper Alloy
- Operating temperature -40°C to +130°C
(Includes temperature rise limit)
- Stripping length 7-8 mm / 0.28–0.31 in
- Dielectric strength 2.5KVAC (Min.)
- Insulation resistance 50MΩ, 500VDC
- UL Approval 320V, 9A, 24~18 AWG



■ PART NUMBERING SYSTEM

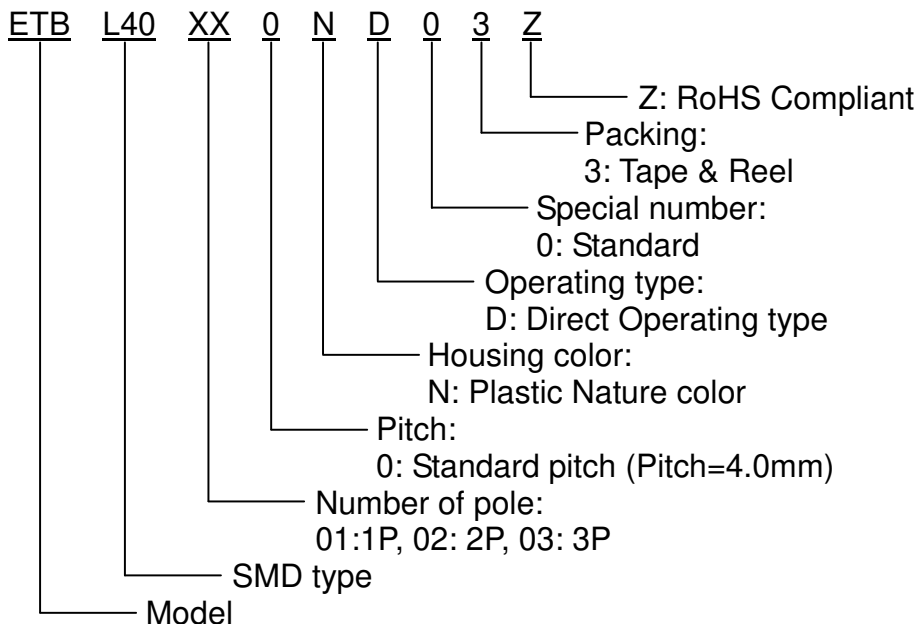

SCREWLESS TYPE LED LIGHTING SMD CONNECTOR – ETBL40 SERIES



■ PACKING

1.Packing method

- Connectors are packed by tape & reel packing method.

■ DRAWING

