


# EUROSTYLE P.C.B. TERMINAL BLOCK – ETB11 SERIES



**WIRE PROTECTOR TYPE**    PITCH=5.0 / 10.0mm

## FEATURES


- Easy to assemble for any number of positions
- End stackable without any loss of P.C.B. space
- Special wire protector design to ensure reliable wire clamping
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Compact size for P.C.B.

## SPECIFICATIONS


- Pitch                                    5.0mm, 10.0mm
- Wire range                            22~14 AWG (2.5mm<sup>2</sup>)
- No. of pole per block            2P or 3P
- Rating                                    8 Amp, 300 VAC
- Housing                                PA66
- Terminals                            Tin plated over Brass
- Screws                                M2.6x0.45P, Zinc plated over Steel
- Wire protector                    Stainless Steel
- Torque                                 0.25 N-m (2.18 lb-in) (tested by manual torque screwdriver)
- Operating temperature        -30°C ~ +110°C  
(includes temperature rise limit)
- Stripping length                 6mm
- UL Approval                        300V, 8A, 22~14 AWG




## PART NUMBERING SYSTEM

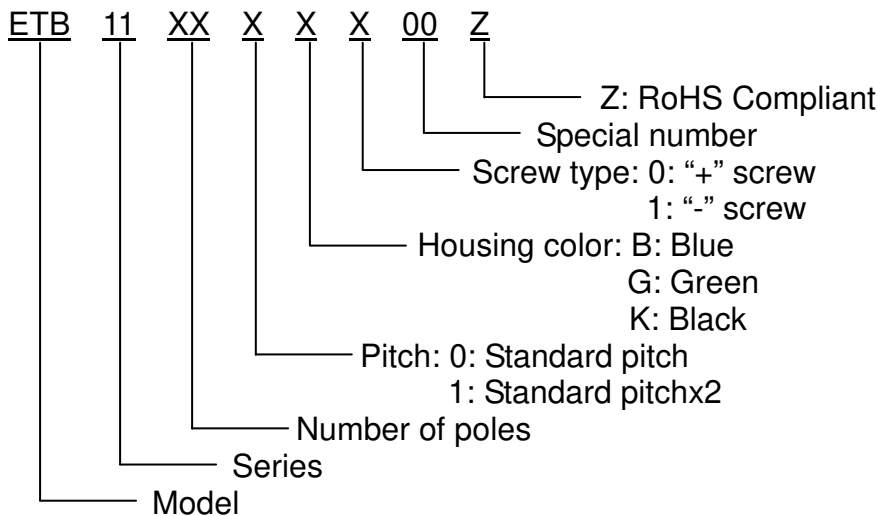

# EUROSTYLE P.C.B. TERMINAL BLOCK - ETB11 SERIES



## DRAWING

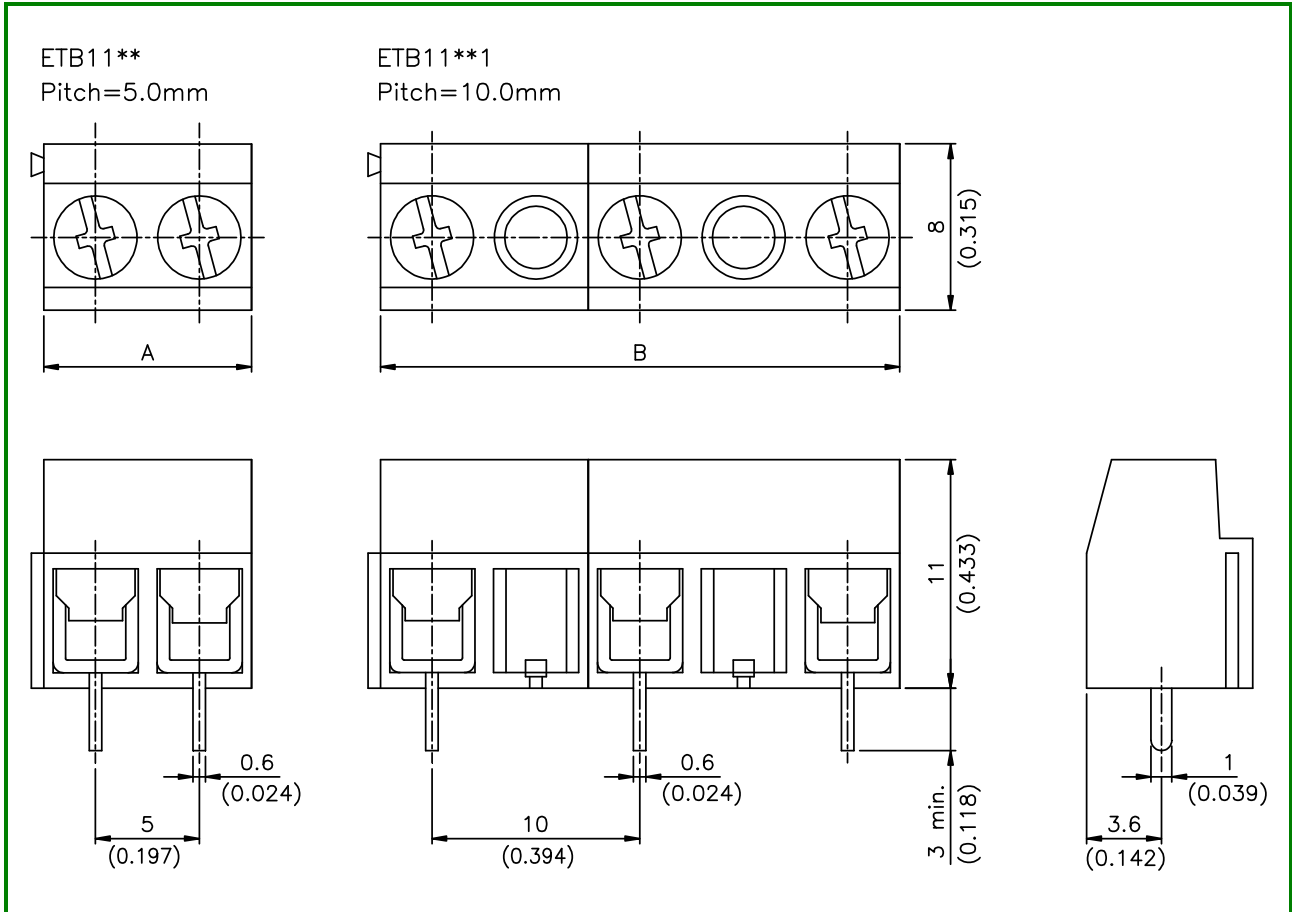

POLE DIM.	2	3	4	5	6	7	8	9	10	11	12	13
A	10 (0.394)	15 (0.591)	20 (0.787)	25 (0.984)	30 (1.181)	35 (1.378)	40 (1.575)	45 (1.772)	50 (1.969)	55 (2.165)	60 (2.362)	65 (2.559)
B	15 (0.591)	25 (0.984)	35 (1.378)	45 (1.772)	55 (2.165)	65 (2.559)	75 (2.953)	85 (3.346)	95 (3.740)	105 (4.134)	115 (4.528)	
POLE DIM.	14	15	16	17	18	19	20	21	22	23	24	
A	70 (2.756)	75 (2.953)	80 (3.150)	85 (3.346)	90 (3.543)	95 (3.740)	100 (3.937)	105 (4.134)	110 (4.331)	115 (4.528)	120 (4.724)	